



2 PC 316SS FULL PORT BALL VALVE

MODEL LVSS2BV



DESCRIPTION:

- **Threaded:** NPT
- **Materials:** SS316
- Certified to NSF/ANSI 61 & 372
- Working pressure 1000 PSI for WOG
- Adjustable stem packing
- Pure Teflon™ seals and seats
- Temperature range: -60 to 450°F
- Blow-out proof stem and safe pressure-reducing hole
- 100% leakage tested at 100 PSI air under water
- Hydrostatic test pressure 1500 PSI
- **Size:** 1/4" - 4" full port/bore (1000) PSI

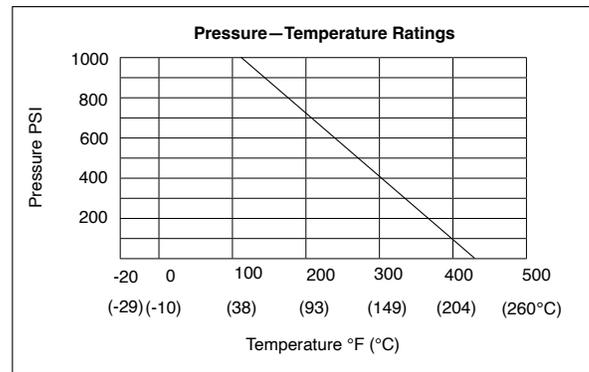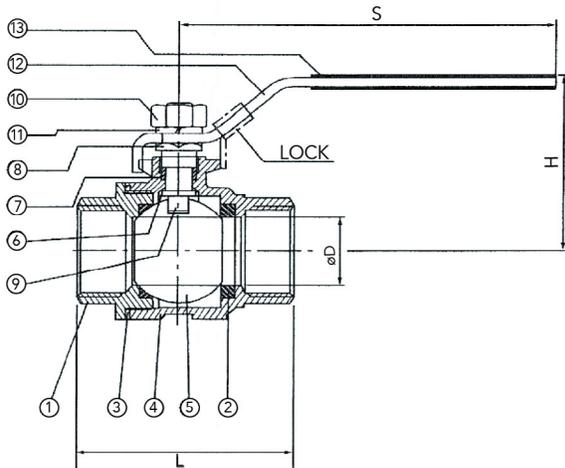

No.	NAME	MATERIAL	QTY
1	Cap	316	1
2	Ball Seat	PTFE	2
3	Joint Gasket	PTFE	1
4	Body	316	1
5	Ball	316	1
6	Thrust Washer	PTFE	1
7	Stem Packing	PTFE	1
8	Gland Nut	304	1
9	Stem	316	1
10	Stem Nut	304	1
11	Spring Washer	304	1
12	Handle	304	1
13	Plastic Sleeve	PVC	1

Size (in.)	D (in.)	L (in.)	H (in.)	S (in.)
1/4	.50	1.86	1.83	3.92
3/8	.50	1.86	1.83	3.92
1/2	.60	2.30	1.90	3.92
3/4	.80	2.60	2.43	5.00
1	1.00	3.00	2.73	5.00
1-1/4	1.25	3.54	3.18	6.00
1-1/2	1.50	1.50	3.43	6.00
2	2.00	4.80	3.76	7.56
2-1/2	2.56	5.72	4.70	9.76
3	3.00	6.57	5.12	9.76
4	4.00	8.82	6.58	12.60

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	