




NRS RESILIENT SEATED GATE VALVE THREADED ENDS - 2"

MODEL LVNRSTH-2

GENERAL SPECIFICATIONS:

- Ductile iron wedge, EPDM encapsulated
- Triple O-Ring stem seal
- Stainless steel non-rising stem
- Fusion bonded epoxy coated interior and exterior to AWWA C550 standard
- Threads- FNPT to ANSI B1.20.1
- Pressure rated to 250 PSI
- Temperature range: 33° F to 170° F
- Available open right, please specify

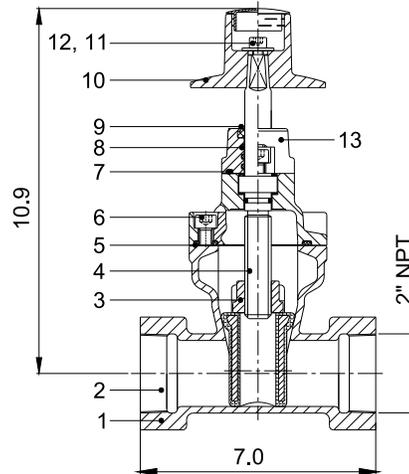


	PART NAME	MATERIAL	ASTM. SPEC.
1	BODY	Gray Cast Iron	A126-Class B
2	WEDGE	Ductile Iron	EPDM Encapsulated
3	WEDGE NUT	Bronze	B763C95200
4	STEM	Stainless Steel	A276 Type 304
5	BONNET GASKET	EPDM	D2000
6	SCREW	Carbon Steel	A307 Class B
7	GLAND O-RING	NBR	D2000
8	O-RING	NBR	D2000
9	STEM WIPER	NBR	D2000
10	OPERATING NUT	Ductile Iron	A536 65-45-12
11	SCREW	Stainless Steel	F593 GRADE 304
12	WASHER	Stainless Steel	A276 Type 304
13	GLAND	Ductile Iron	A536 65-45-12

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	


NRS RESILIENT SEATED GATE VALVE PUSH-ON X PUSH-ON

MODEL LVNRSPO

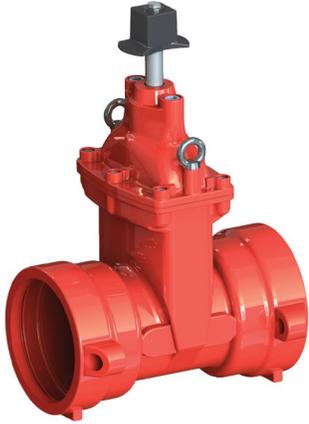

GENERAL SPECIFICATIONS:

- Ductile iron wedge, EPDM encapsulated
- Triple O-Ring stem seal
- Stainless steel non-rising stem
- Fusion bonded epoxy coated interior and exterior to AWWA C550 standard
- Pressure rated to 250 PSI
- Temperature range: 33° F to 170° F
- Available open right, please specify

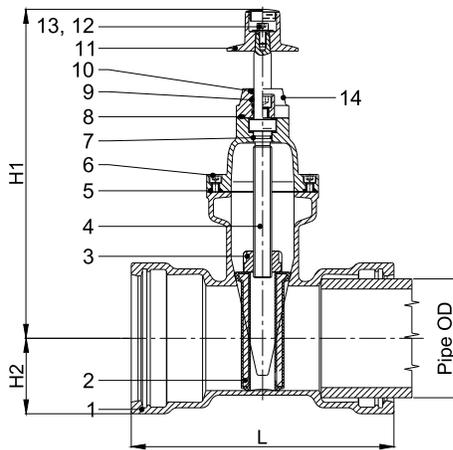

DIMENSIONS (In.)					
SIZE	2-1/2	3	4	6	8
L	10.8	12	13.8	14.8	17.9
H1	11.6	13.2	14.2	18.6	21
H2	2.4	2.7	3.2	4.3	5.6
PIPE OD	2.9	3.5	4.8	6.9	9.1
	Steel Pipe		Cast Iron Pipe		

	PART NAME	MATERIAL	ASTM. SPEC.
1	BODY	Ductile Iron	A536 65-45-12
2	WEDGE	Ductile Iron	EPDM Encapsulated
3	WEDGE NUT	Bronze	B763 C95200
4	STEM	Stainless Steel	A276 Type 304
5	BONNET GASKET	EPDM	D2000
6	SCREW	Carbon Steel	A307 Class B
7	O-RING	NBR	D2000
8	GLAND O-RING	NBR	D2000
9	O-RING	NBR	D2000
10	STEM WIPER	NBR	D2000
11	OPERATING NUT	Ductile Iron	A536 65-45-12
12	SCREW	Stainless Steel	F593 GRADE 304
13	WASHER	Stainless Steel	A276 Type 304
14	GLAND	Ductile Iron	A536 65-45-12

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	